



NURSERY SWING

Important: Before you assemble the Nursery Swing, it is important that you read the safety notice below, and then read and follow these instructions carefully. If you have any problems, queries or concerns, please telephone our Customer Services Department on 08705 352 352.

IMPORTANT SAFETY NOTICE

Position the Nursery Swing on a soft, level surface such as carpet or grass – NEVER on a hard surface. We recommend for indoor use, that the swing is positioned on a carpeted surface as the swing may move on smooth surfaces such as linoleum or laminate flooring. The Nursery Swing is designed for children not weighing more than 23kg. Never leave your baby unsupervised in the swing.

Always use the 4 point harness and always engage the 'T' bar before swinging. DO NOT use without the 'T' bar and always ensure the frame is fully opened with both catches are engaged prior to use. Please refer to pre-applied label on top section of nursery swing.

Always supervise children while they are playing on the Nursery Swing. Make sure they do not wear anything that can catch or snag on the equipment (e.g. jackets with hoods or cords, clothes with baggy pockets, jewellery).

Check nuts and bolts regularly and tighten them if necessary. If not checked regularly, bolts can loosen and components may become detached and cause injuries.

All ropes must be checked regularly for signs of wear.

Keep small parts away from children during assembly.

BEFORE YOU START

This leaflet gives instructions for assembling the frame and for attaching the seat. The Nursery Swing should be assembled by an adult, perhaps with another adult to help. **Taking time over the assembly helps to ensure safety.**

We recommend that you check all the parts against the Parts List before starting. Do this by laying out all the parts on a flat surface – but not on grass.

Use the spanner and Allen key provided. Do not use pliers, as these can cause damage.

QUALITY

The Nursery Swing is made from strong steel tubes, coated with tough polyester paint. All other metal parts (e.g. nuts and bolts) have been specially plated. The product has been fully tested for paint toxicity and for mechanical and physical properties. Certificates have been granted for British Standard BS EN 71.


CARE OF YOUR NURSERY SWING

Check the paintwork regularly and if necessary touch up using a non-toxic enamel or car type paint (available from good DIY stores). We regret we cannot supply paint as the type we use is suitable only for machine application.

IMPORTANT

Have you read the safety notice above? Remember to always supervise children while they are playing on the Nursery Swing.


Toys that make learning fun!




Early Learning Centre

ASSEMBLE THE TOP

1

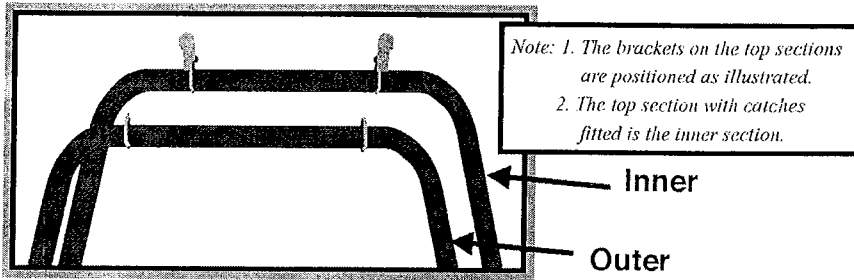


A



ADD THE LEGS

2

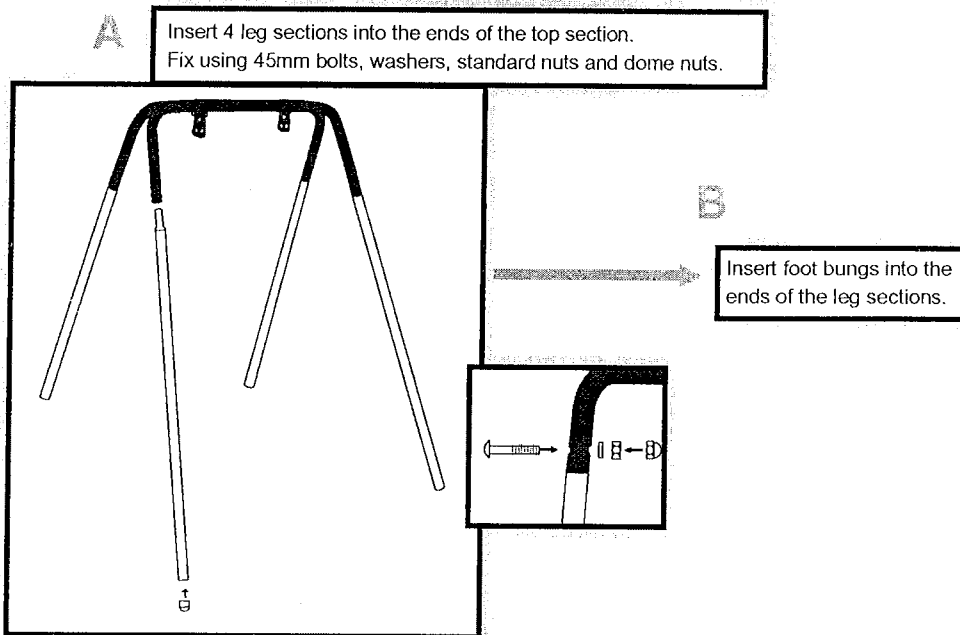

ADD


3

A



ADD THE 4 POINT HARNESS

4

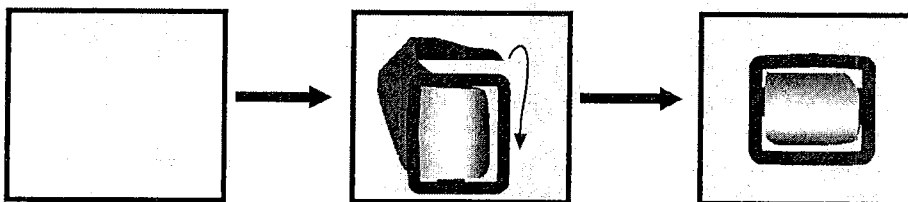


Fit lap strap and shoulder straps to seat by pushing the end fittings through the slots as illustrated.

Note: the shoulder straps must be positioned above the child's shoulders.


READY FOR

5


A

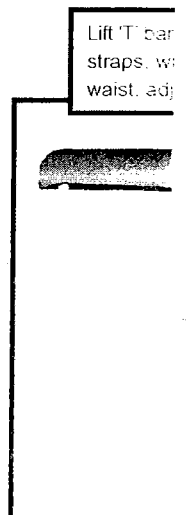

NURSERY SWING

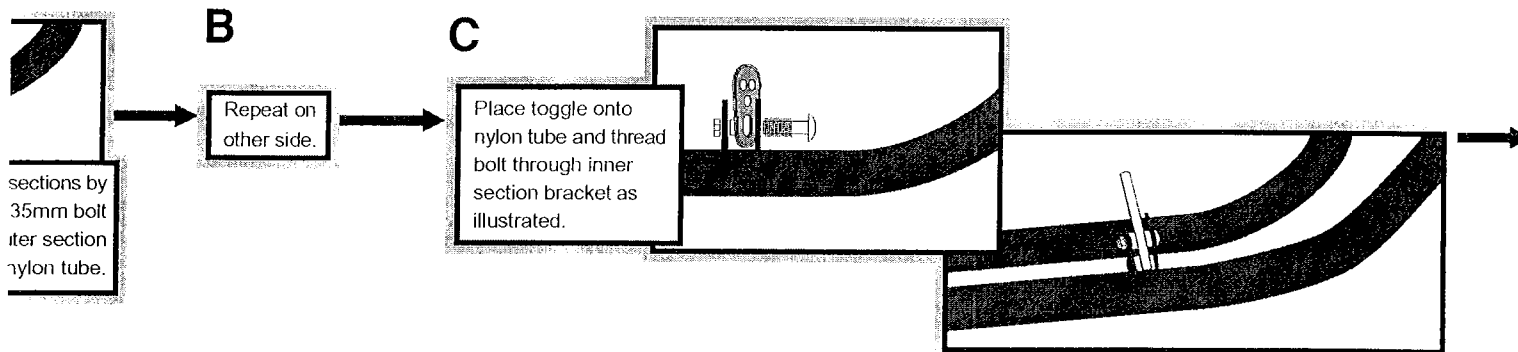


THE SWING SEAT

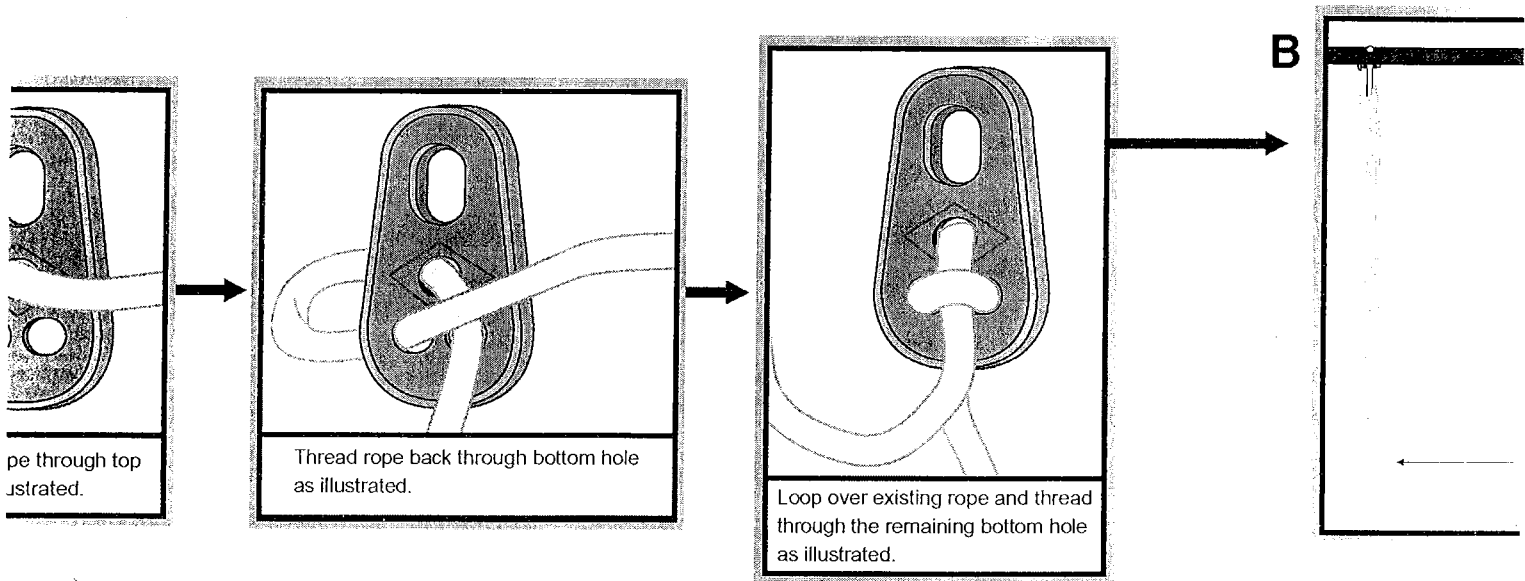

USE


Place child into seat, fit shoulder up lap strap around the child's chest and fasten.




B

To fit the 'T' bar, locate into hole as illustrated.



Note: The top of the 'T' bar will locate onto sides (the rope must pass through holes in the 'T' bar.)

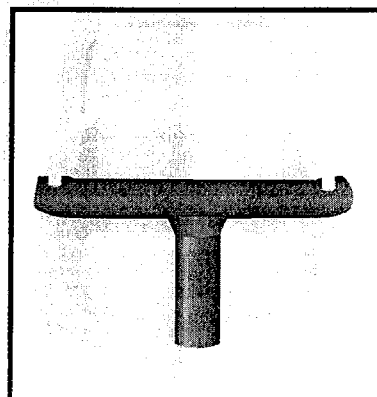

C



To



D

Repeat on other side.

E



Add a washer and a self locking nut to each bolt and tighten.

There should be at least 3 threads exposed when fully tightened.

F


Fully open completed top section and engage both catches.

IMPORTANT NOTICE
Both catches must be fully engaged whilst the product is in use. Please refer to pre-applied label on top section of nursery swing.

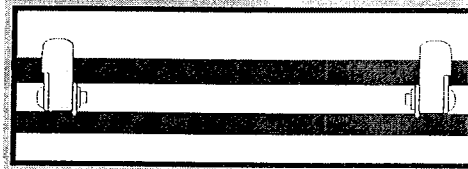

C

Adjust rope through the toggles, making sure the front lengths of rope are longer than the back.

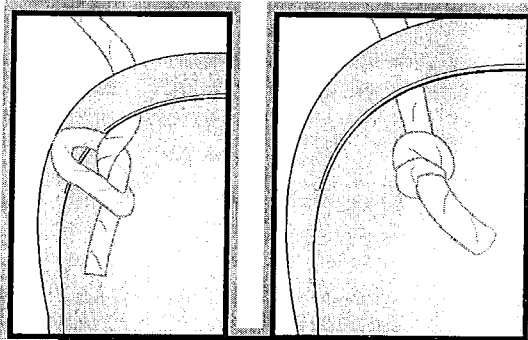

Pull the rope lengths through the 4 holes in the seat and tie into knots as diagram.




Allow sufficient rope to tie the knots.

The rope must also pass through the holes of the 'T' bar.

There must be 25mm of rope after the knot.

D











Lock 'T' bar twist upright as illustrated.

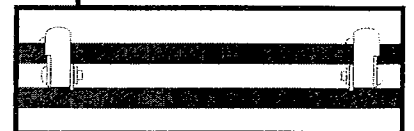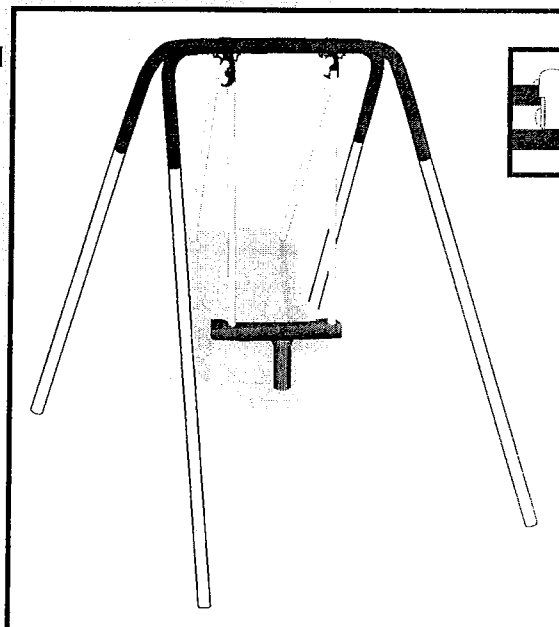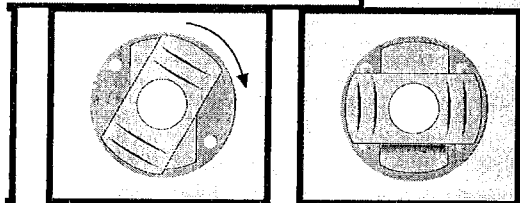

Important Notice

1. Always fully open nursery swing and engage both catches prior to use.
2. The front 'T' must be fitted whilst swing is in use.
3. Please refer to pre-applied label on top section of nursery swing.

PARTS LIST

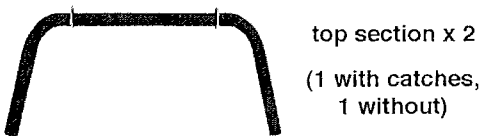

LIFETIME GUARANTEE

The metal framework of the equipment detailed within is guaranteed by the Early Learning Centre, for the lifetime of the product against rust perforation.

Rust perforation is defined as rusting-through of metal tubes due to rust corrosion 'from the inside out'.

Any defective part or parts will (as we see fit) either be exchanged or repaired free of charge. This guarantee is subject to the product having been used for the purpose for which it is designed, and in accordance with the instruction leaflet and our maintenance guidelines.

The guarantee does not cover any damage caused by storms, fire or floods, or by neglect or misuse. Any repairs or alterations carried out, other than by Early Learning Centre personnel, could also invalidate this guarantee.

Please retain this guarantee and staple your receipt (your proof of purchase) to these instructions for future reference.

This guarantee does not affect or prejudice any statutory right you may have. Please contact your local Early Learning Centre or our Customer Services Department regarding any query or claim on this guarantee. Any claim under this guarantee must be notified to your Early Learning Centre or our Customer Services Department within 30 days of discovery of the defect.

Product No. 101771

Product Name NURSERY SWING

Product Code

Model

Material

Weight

Country of Origin

Manufacturer

Supplier



Conforms to British Standard BS EN 71